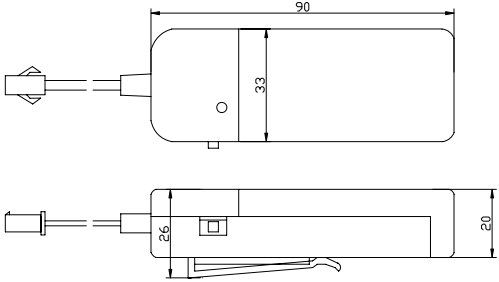



ZHONG SHAN SHI RUI XIAN ELECTRONICS FACTORY

Add:No. 73, Jinyinan Road, Dongfeng Town, Zhongshan City Tel:+86-760-86172690 23935789
 Fax: +86-760-22635327 Http:www.neon-elwire.com E-mail:open686@vip.sina.com

Product Data Sheet

P/N:EL INVERTER MODE: EF-4S Description: EF-4S is a small portable battery pack inverter designed to drive up to 3m of EL Wire.					
Features: 1. Two operating modes: Continuous and Blinking 2. Portable. 3. Battery operated by two AA 4. Low power consumption. 5. Low audible noise. 6. Indoor use.			Applications: 1. Do it yourself. 2. Home decoration 3. Car decoration. 4. Home made signs. 5. Improves visibility for night jogging and bicycle riders 6. Party and event centerpiece.		
Electronical pecifications: Input Voltage: 3VDC Input Current Range (with load): 0.20 – 0.27 (A) Output Frequency: 1.2 – 2.5 (KHz) Output Voltage Range:50 – 130 (Vrms) EL Wire Length: 1 – 5 (meter) Not load:114V 34MA			Mechanical Specifications: Dimensions (L x W x H): 90 x 33 x 20 (mm) Weight: 45 g Operating Temperature: -10 – 60 (°C) Storage Temperature: -20 – 65 (°C) Relative Humidity: 70% RH		
LyTec™ M1S Length	Input Voltage	Input Current	Frequency	Output Voltage	
[m]	[VDC]	[mA]	[KHz]	[Vrms]	
1	3	200	3	130	
2	3	240	2.3	100	
3	3	250	1.8	86	
4	3	250	1.65	75	
5	3	270	1.45	60	
LyTec™ 48S HB Length	Input Voltage	Input Current	Frequency	Output Voltage	
[m]	[VDC]	[mA]	[KHz]	[Vrms]	
1	3	250	2.6	110	
2	3	260	1.8	76	
3	3	270	1.6	65	
4	3	280	1.35	54	
5	3	280	1.3	52	

Remarks : Test data for reference purposes only! Please order samples to confirm