

Description:

RX-16T LED tube lighting, suitable for automotive motorcycle decorative lighting, home decorative lighting


	<p>Advantages:</p> <ol style="list-style-type: none"> 1.High intensity LEDs 2.Chromium plating, PC tube, Beautiful beautiful 3.Waterproof design, waterproof grade IP67 4.5x2.1mm DC plug wire, easy to install 5.B type is set to head and tail of male and female DC cable can be extended docking LED Lamp <p>Scope of application:</p> <p>Home decorative lighting, fish tank aquarium lighting, cabinets, showcase, Showcase lighting decoration. Home wash wall lamp, plant growth lights (red and blue color tube).</p>
--	---

<p>TYPE A: Plug connections with male at one ends</p> <p>TYPE B: Plug connections with male and female at oposite ends</p> <p>TYPE A: Input wire at one ends</p> <p>TYPE B: Connections - wire at both ends</p>	<p>Mechanical Specifications:</p> <p>LED lamp length :15cm, 30cm, 52cm Diameter: Ø16mm Operating Temperature: -20°C~60°C IP Grade: IP67</p> <p>Electronical Specifications:</p> <p>Input: DC12V Power: max 0.07W / LED Center positive for stock, 5.5x2.1mm DC jack and plug Or + Red wire , - Black wire</p>
---	---

Note: Power quality may seriously affect the product life, Please use high-quality switching power supply, or directly using my company-related products. DC input (Cars and motorcycles) please use the type of without DC plug wire

Model Number	LED spacing	Tube Diameter	LED Type	Viewing Angle	Input Voltage	Max. Power	Continuous Connection
RX-16TH20-5R	20mm	16mm	5mm round	20°	12V	0.07W/LED	10M
RX-16TH20-5H	20mm		5mm straw hat	120°			10M
RX-16TH10-5R	10mm		5mm round	20°			5M
RX-16TH10-5H	10mm		5mm straw hat	120°			5M
RX-16T10-5R	10mm		5mm round	20°			5M
RX-16T10-5H	10mm		5mm straw hat	120°			5M
RX-16T10-SFL	10mm		SFL/Piranha	80°			5M
RX-16T16-5050	16mm		TOP SMD5050	120°			0.21W/LED

Dimension

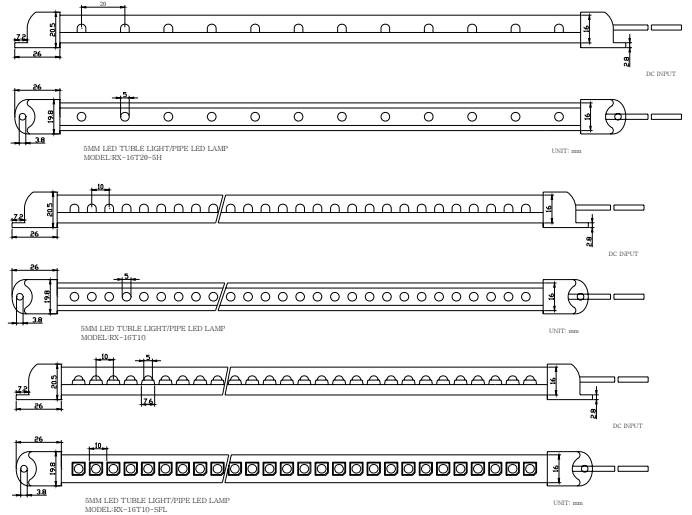

Note:

RX-16T:

The use of chrome stickers

RX-16TH:

Perforation of the PCB LED double-sided light more brightness

Available colors:

RX-16Txx-5R, RX-16Txx-5H, RX-16THxx-5R, RX-16THxx-5H Red, yellow, blue, green, purple, pink, white and warm white


Note: According to product data sheet, Where xx can be Related alphanumeric character or blank



RX-16T16-5050, RX-16T10-SFL Blue, white, warm white and RGB (RX-15T16-5050)



Wiring diagram



There is LED power supply and [LED dimmer](#) connection

